



Skyfol SI15

Window film



Energy saving

Save money on cooling bills



Heat protection

Rejects radiant heat



Light protection

Glare is reduced



Privacy protection

Gives daytime privacy



Uniform temperature

Hot and cool spots are levelled off



Manufacturer

Commonwealth
Laminating&Coating, USA



35 years of experience

One of the longest-operating
distributors in the industry



Modern appearance

The building gets more beautiful



UV protection

Protects your health and
your valuables

Energy saving on various window systems



Single pane




Dual pane



Dual pane
low-e



Triple pane
low-e

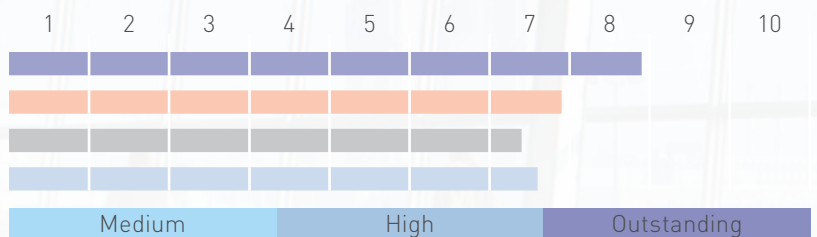

Save energy with window films!

	Single pane	Dual pane	Dual pane low-e	Triple pane low-e
Total Solar Energy Rejected	79%	69%	64%	66%
Visible Light Transmitted	15%	17%	17%	16%
Visible Light Reflected Exterior	60%	59%	59%	58%
Visible Light Reflected Interior	58%	59%	59%	59%
Total Solar Energy Reflected	55%	52%	52%	47%
Total Solar Energy Absorbed	33%	36%	36%	43%
Total Solar Energy Transmitted	12%	12%	12%	11%
SHGC	0,25	0,31	0,36	0,34
UV Rejection	99%	99%	99%	99%
U-Value	5,337	2,618	1,434	1,153
Emissivity	0,84	0,84	0,84	0,84
Compatibility	Compatible	Compatible	Compatible	Conditionally Compatible



Interior/exterior

Interior



Thickness

38 microns



Adhesive

Pressure sensitive



Scratch Resistant Coating

2nd generation



Sizes available

0,91×30 m, 1,22×30 m
1,52×30 m, 1,83×30 m



Warranty

10 years