



**Energy saving**  
Save money on cooling bills



**Protection against shards of glass**  
In case of breakage, the glass is held together



**Light protection**  
Glare is reduced



**EN 12600 certified**  
International breakage certification



**Privacy protection**  
Gives daytime privacy



**Scratch-free**  
Industrial Scratch Resistant Coating



**35 years of experience**  
One of the longest-operating distributors in the industry




**Modern appearance**  
The building gets more beautiful



**UV protection**  
Protects your health and your valuables

### Energy saving on various window systems

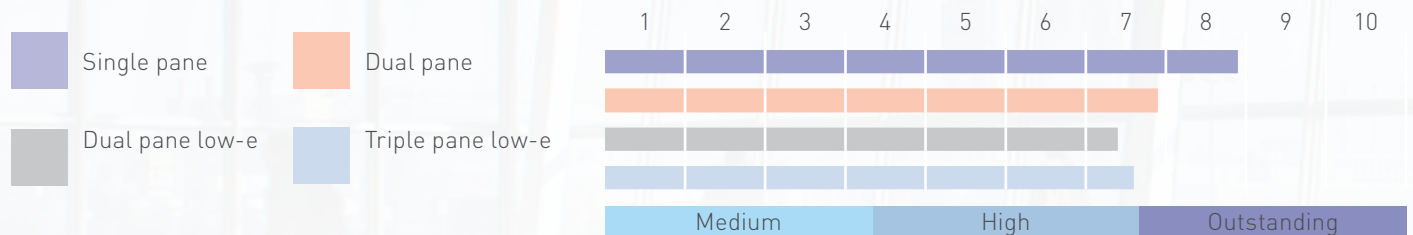

## Save energy with window films!

<b>Tensile strength</b> 33600 psi 232 N/mm <sup>2</sup>	<b>Break strength</b> 134 lbs/inch 23 N/mm	<b>Puncture strength</b> 103 lbs 458 N
---	--	--

	Single pane	Dual pane	Dual pane low-e	Triple pane low-e
Total Solar Energy Rejected	79%	69%	64%	66%
Visible Light Transmitted	15%	17%	17%	16%
Visible Light Reflected Exterior	60%	59%	59%	58%
Visible Light Reflected Interior	59%	59%	59%	59%
Total Solar Energy Reflected	55%	52%	52%	47%
Total Solar Energy Absorbed	33%	36%	36%	43%
Total Solar Energy Transmitted	12%	12%	12%	11%
SHGC	0,21	0,31	0,36	0,34
UV Rejection	99%	99%	99%	99%
U-Value	5,34	2,62	1,43	1,15
Emissivity	0,84	0,84	0,84	0,84

**Compatibility**                      Compatible    Compatible    Compatible    Conditionally Compatible



**Interior/exterior**  
Interior



**Thickness**  
100 microns



**Adhesive**  
Double security adhesive



**Scratch Resistant Coating**  
2<sup>nd</sup> generation



**Sizes available**  
1,52x30 m



**Warranty**  
10 years



**Certification**  
EN12600 2B2



**Layers**  
Multi